



Graver Technologies

Filtration | Separation | Purification

PMC™ Series Filter Cartridges

Economically Efficient Pleated Filter Cartridges

This cost effective, disposable filter element can be used for a wide range of applications. The filter is constructed of pleated polypropylene filter media with high surface area that allows for greater system flow rate.

Features–Benefits

- Micron ratings from 0.2 to 50 µm– Broad application range
- Fixed pore structures– Resists unloading of captured contaminant
- Polypropylene Construction– Inert to many process fluids
- Various Gasket/O-Ring materials– Compatible with a variety of fluids
- Economically efficient filtration
- Manufactured in continuous lengths up to 40 inches

Product Specifications

Media:	Polypropylene
Inner core:	Polypropylene
End caps:	Polypropylene
Cage:	Polypropylene
Gaskets/O-Rings options:	Buna-N, EPDM, Silicone, Viton, Teflon Encapsulated Viton (O-Rings only)
Micron ratings:	0.2, 0.25, 0.45, 0.5, 1.0, 2.0, 5.0, 10, 25, 50µm
*Other micron rated media available upon request	

Dimensions

Nominal lengths:	5", 9.75", 10", 20", 30", 40" (12.7, 24.8, 25.4, 50.8, 76.2, 101.6 cm)
Outside diameter:	2.7" (6.86 cm)
Inside diameter:	1.0" (2.54 cm)

Operating Parameters

Maximum operating temperature:	176 °F (80°C)
Differential pressure:	75 psid @ 70°F (5.2 bar @ 21°C) 40 psid @ 176°F (2.8 bar @ 80°C)
Recommended change-out pressure:	35 psid (2.4 bar)




Certifications

USP Class VI - Meets USP Class VI Biological Test for Plastics.

FDA Listed Materials - All Materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.


European Directive for Direct Food Contact - European Regulations No 1935/2004 and European directive 82/711/EEC: Tested for migration behavior in direct food contact. Minimal rinse required for use. Data available upon request.



PMC Nomenclature Information

PMC	2	-20	P8	V
Filter Type PMC Series Filters		Nominal Length (inches)	End Configuration	Gasket or O-Ring
Retention Rating (microns)		-5	P Double Open End	S Silicone
0.2	2	-9.75	P2 226/Flat Single Open End	B Buna-N
0.25	5	-10	P3 222/Flat Single Open End	E EPDM
0.45	10	-20	P7 226/Fin Single Open End	V Viton
0.5	25	-30	P8 222/Fin Single Open End	T Teflon endcap. Viton (O-Rings only)
1	50	-40	AM Single open end, internal O-Ring	T Teflon (Gasket only)
			NPC Double open end, internal O-Ring	

Example: PMC 2-20P8V

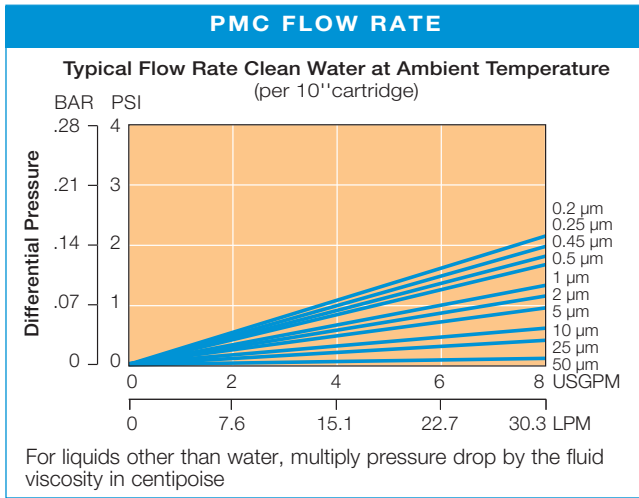

Removal Efficiency

Beta Ratio Efficiency	Beta 50 98%	Beta 10 90%
0.2 micron	0.28	0.20
0.25 micron	0.35	0.25
0.45 micron	0.6	0.45
0.5 micron	0.7	0.5
1 micron	1.5	1.0
2 microns	2.7	2.0
5 microns	7.0	5.0
10 microns	12.0	10.0
25 microns	32.0	25.0
50 microns	70.0	50.0

$$\text{Beta Ratio} = \frac{\text{Upstream particle counts}}{\text{Downstream particle counts}}$$

The micron ratings shown at various efficiency and beta ratio value levels were determined through laboratory testing, and can be used as a guide for selecting cartridges and estimating their performance. Under actual field conditions, results may vary somewhat from the values shown due to the variability of filtration parameters.

Testing was conducted using the single-pass test method, water at 3 gpm/10" cartridge. Contaminant's included latex beads, coarse and fine test dust. Removal efficiencies were determined using dual laser source particle counters.

DISTRIBUTED BY:

For more information

Graver Technologies Customer Service: **1-888-353-0303**

Technical Support: **1-888-353-0303**

E-mail us at info@gravertech.com

Graver Technologies Europe (UK): **+44-1424-777791**

All information and recommendations appearing in this bulletin concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Graver Technologies as to the effects of such use or the results to be obtained. Graver Technologies assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

PMC is a trademark of Graver Technologies, LLC.



200 Lake Drive
Glasgow,
DE 19702 U.S.A.

302-731-1700
800-249-1990
Fax: 302-369-0938

e-mail: info@gravertech.com
web site: www.gravertech.com

